
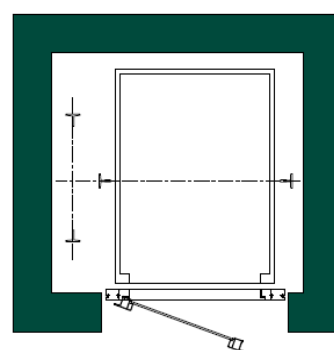
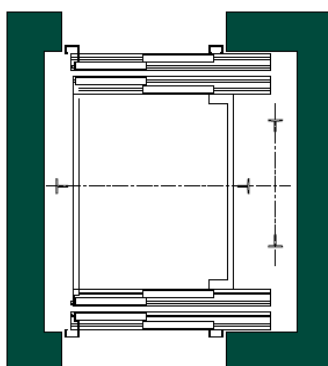
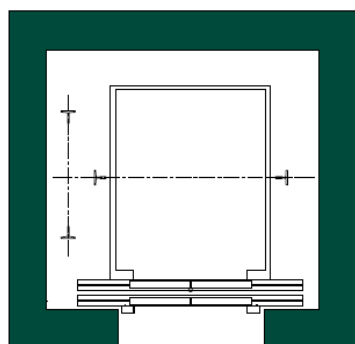


## GHT-C2 Center Guided Frame Type

## GHT-C2 型轿架式电梯

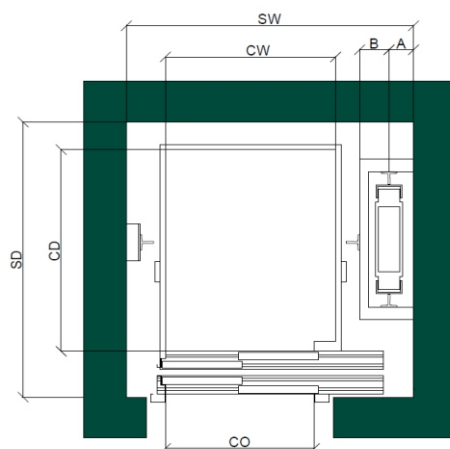

### 主要技术参数 Main Technical Data

| GHT-C2型系统/System                                        | C-320    | C-400    | C-630    | C-800    | C-1000   |
|---------------------------------------------------------|----------|----------|----------|----------|----------|
| 额定载重/Rated Load (kg)                                    | 320      | 400      | 630      | 800      | 1000     |
| 人数/People No.                                           | 4        | 5        | 8        | 10       | 13       |
| 最大速度/Max. Speed (m/s)                                   | 1        | 1        | 1.75     | 1.75     | 1.75     |
| SW 井道宽度/Shaft Width (mm)                                | 1450     | 1550     | 1700     | 1900     | 2000     |
| SD 井道深度/Shaft Depth (mm)                                | 1450     | 1550     | 1700     | 1900     | 2050     |
| CW 轿厢宽度/Car Width (mm)                                  | 900      | 1000     | 1100     | 1200     | 1300     |
| CD 轿厢深度/Car Depth (mm)                                  | 1150     | 1200     | 1400     | 1550     | 1700     |
| CO 开门宽度/Clear Opening (mm)                              | 800      | 800      | 900      | 900      | 1000     |
| 最小地坑深度/最小顶层高度<br>Min. Pit depth and Min. Over head (mm) | 400/2500 | 400/3500 | 800/3200 | 800/3200 | 800/3200 |